

Focus Triple

Architectural Collection



aaline's FOCUS Series is designed for precision lighting, carved out of a single block of hardwood. Enhanced with anti-glare carved visors (UGR <16) and 90+ CRI LED chips, this collection has the highest-performing lighting fixtures in their class.

Power Input	110-277V AC 50/60 Hz
Weight	< 2 lbs per foot < 3 kg per metre
Lumen Output Direct	Low 4FT: 1800 lm, 13.1 W, 135 lm/W 6FT: 2700 lm, 19.6 W, 135 lm/W, Standard 4FT: 2700 lm, 19.7 W, 135 lm/W 6FT: 4050 lm, 29.4 W, 135 lm/W, High 4FT: 3600 lm, 26.2 W, 135 lm/W 6FT: 5400 lm, 39.3 W, 135 lm/W
Lumen Output Indirect	Low 1452.4 lm 12.4 W 117.1 lm/W, Standard 2234.4 lm 19 W 117.6 lm/W, High 3383 lm 28.8 W 117.5 lm/W
Direct Optics	Medium ~35°, Wide ~50°, Extra Wide ~80°, Asymmetric, Asymmetric Wall Wash, Oval ~25° + 70°
Indirect Optics	Lambertian, Batwing Wide ~145° + 100°, Batwing Extra Wide ~165° + 130°, Asymmetric
Suspension	Adjustable up to specified length Standard: 5 ft 152 cm

<https://app.electrifyconnect.com/public/aaline/products/focus-triple>

Product design at aaline is continuously refined to uphold the highest quality standards. We reserve the right to change specifications, contact us for the latest information. Final specifications and material selections will be confirmed at the shop drawing stage.

orders@aaline.ca

647-254-3919

<https://www.aaline.ca/>

Ordering Guide

CERT	SERIES	MODEL	LENGTH	LIGHT DISTRIBUTION
LW-EB Linear Embedded	FO Focus	03 Triple	4 4 ft	DN Direct
			6 6 ft	UP Indirect
				DU Direct + Indirect
DRIVER	CIRCUIT	DIMMING	LUMEN OUTPUT DIRECT	LUMEN OUTPUT INDIRECT
R Remote	1C 1 Circuit	010 0-10V	LO Low	LO Low
C Powered Canopy	2C 2 Circuit	020 TRIAC/ELV DAL DALI	4FT: 1800 lm 13.1 W 135 lm/W	1452.4 lm 12.4 W 117.1 lm/W
			6FT: 2700 lm 19.6 W 135 lm/W	ST Standard
			ST Standard	2234.4 lm 19 W 117.6 lm/W
			4FT: 2700 lm 19.7 W 135 lm/W	HI High
			6FT: 4050 lm 29.4 W 135 lm/W	3383 lm 28.8 W 117.5 lm/W
			HI High	
			4FT: 3600 lm 26.2 W 135 lm/W	
			6FT: 5400 lm 39.3 W 135 lm/W	
OPTICS DIRECT	OPTICS INDIRECT	COLOUR TEMP	WOOD	WOOD FINISH
OV Oval ~25° + ~70°	LB Lambertian	27K 2700K Warm White 90+ CRI	WAL Walnut	CFST Clear Finish Satin
MD Medium ~35°	BW Batwing Wide ~145° + 100°	30K 3000K Soft White 90+ CRI	OAK White Oak	CFDO Clear Finish Danish Oil
W1 Wide ~50°	BX Batwing Extra Wide ~165° + 130°	35K 3500K Bright White 90+ CRI	CHR Cherry	CFEC ECO Zero VOC
W2 Extra Wide ~80°	AS Asymmetric	40K 4000K Cool White 90+ CRI	MPL Hard Maple	PFBK Painted Satin Black
AS Asymmetric			ASH White Ash	PFWH Painted Satin White
AW Asymmetric Wall Wash				PFFX Enter a custom paint code
ANTI-GLARE CELL FINISH	ACOUSTIC FINISH	FENIX NTM	CANOPY COLOUR	CABLE COLOUR
AGNA Natural Matches wood selection	F384 Felt Charcoal	FXBK Bianco Kos	WH White	C Clear Jacket with Silver Core
AGBS Black Strip	F382 Felt Pebble Grey	FXVC Verde Comodoro	BK Black	
AGWC White Cell	F311 Felt Wool White	FXBF Blu Fes	Custom Enter a custom canopy colour code.	
	F251 Felt Meadow Green	FXGB Grigio Bromo		
	F152 Felt Olive	FXNI Nero Ingo		
	F000 Enter a custom felt code	F000 Enter a custom Fenix Finish code		
CABLE LENGTH	MOUNTING			
5 5ft Standard Adjustable 1' - 5'	JB Junction Box Support			
Custom (ft) Custom (ft)	PO Power Over Cable			
	TB T-Bar Support For 15/16" T-Bar Width			

Ordering Guide Rules

To be used with Order Guide above. For more questions on availability, contact us at orders@aaline.ca

¹ 2C (CIRCUIT) cannot go with DN and UP (LIGHT DISTRIBUTION)

² DAL (DIMMING) cannot go with C (DRIVER)

³ DN (LIGHT DISTRIBUTION) cannot go with LO and ST and HI (LUMEN OUTPUT INDIRECT)

⁴ UP (LIGHT DISTRIBUTION) cannot go with LO and ST and HI (LUMEN OUTPUT DIRECT)

⁵ DN (LIGHT DISTRIBUTION) cannot go with AS and LB and BW and BX (OPTICS INDIRECT)

⁶ UP (LIGHT DISTRIBUTION) cannot go with W2 and OV and AS and W1 and MD and AW (OPTICS DIRECT)

⁷ WAL or OAK or CHR or MPL (WOOD) cannot go with PFBK and PFWH and PFXX (WOOD FINISH)

⁸ JB (MOUNTING) cannot go with R (DRIVER)


⁹ TB or PO (MOUNTING) cannot go with C (DRIVER)

Specs + Materials


LIGHT DISTRIBUTION




DN
Direct




UP
Indirect



DU
Direct + Indirect

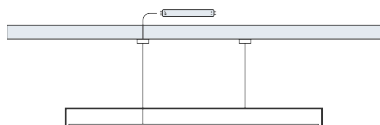


R
Remote




C
Powered Canopy

CIRCUIT




1C
1 Circuit




2C
2 Circuit


OPTICS DIRECT




OV
Oval
~25° + ~70°




MD
Medium
~35°




W1
Wide
~50°



W2
Extra Wide
~80°




AS
Asymmetric



AW
Asymmetric Wall Wash

Specs + Materials

OPTICS INDIRECT

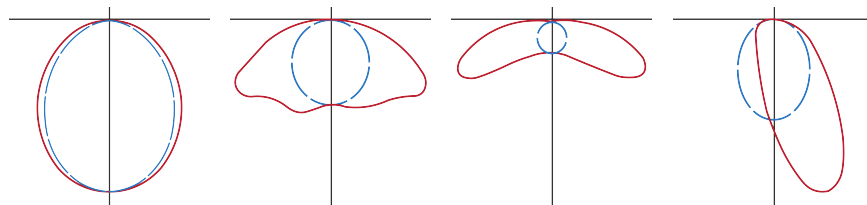

LB

Lambertian

BW

Batwing Wide
~145° + 100°

BX

Batwing Extra Wide
~165° + 130°

AS

Asymmetric

COLOUR TEMPERATURE



27K

2700K
Warm White
90+ CRI

30K

3000K
Soft White
90+ CRI


35K

3500K
Bright White
90+ CRI

40K

4000K
Cool White
90+ CRI

WOOD

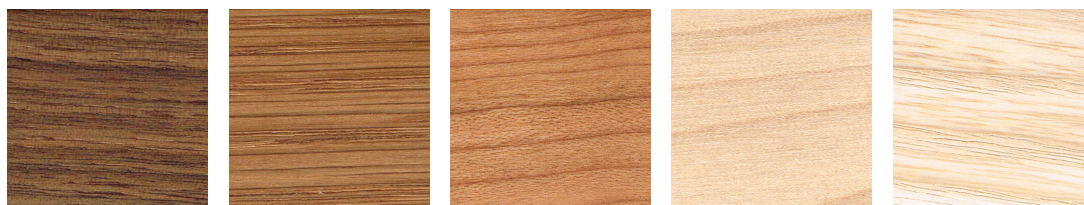

WAL

Walnut

OAK

White Oak

CHR

Cherry

MPL

Hard Maple

ASH

White Ash

ANTI-GLARE CELL FINISH



AGNA

Natural
Matches wood selection



AGBS

Black Strip



AGWC

White Cell

Due to material characteristics and environmental factors, actual product colours/finishes may vary slightly.

Specs + Materials

ACOUSTIC FELT [OPTIONAL]



F384
Felt
Charcoal



F382
Felt
Pebble Grey



F311
Felt
Wool White



F251
Felt
Meadow Green



F152
Felt
Olive



F000
Enter a custom felt code


FENIX NTM [OPTIONAL]



FXBK
Bianco Kos



FXVC
Verde Comodoro



FXBF
Blu Fes



FXGB
Grigio Bromo



FXNI
Nero Ingo



F000
Enter a custom Fenix Finish code

MOUNTING



JB
Junction Box Support



PO
Power Over Cable



TB
T-Bar Support | For 15/16"...