

Focus Single

Architectural Collection

aaline



aaline's FOCUS Series is designed for precision lighting, carved out of a single block of hardwood. Each fixture is enhanced with aaline's proprietary anti-glare carved visors (UGR <16) and 90+ CRI LED chips, available in various editions to suit the look of any space.

Power Input	110-277V AC 50/60 Hz
Weight	< 2 lbs per foot < 3 kg per metre
Lumen Output Direct	Low 4FT: 600 lm, 4.4 W, 135 lm/W 6FT: 900 lm, 6.5 W, 135 lm/W, Standard 4FT: 900 lm, 6.6 W, 135 lm/W 6FT: 1350 lm, 9.8 W, 135 lm/W, High 4FT: 1200 lm, 8.7 W, 135 lm/W 6FT: 1800 lm, 13.1 W, 135 lm/W
Lumen Output Indirect	Low: 1452.4 lm, 12.4 W, 117.1 lm/W, Standard: 2234.4 lm, 19 W, 117.6 lm/W, High: 3383 lm, 28.8 W, 117.5 lm/W
Direct Optics	Oval ~25° + 70°, Medium ~35°, Wide ~50°, Extra Wide ~80°, Asymmetric, Asymmetric Wall Wash
Indirect Optics	Lambertian, Batwing Wide ~145° + 100°, Batwing Extra Wide ~165° + 130°, Asymmetric
Suspension	Adjustable up to specified length Standard: 5 ft 152 cm

<https://app.electrifyconnect.com/public/aaline/products/focus-single>

Product design at aaline is continuously refined to uphold the highest quality standards. We reserve the right to change specifications, contact us for the latest information. Final specifications and material selections will be confirmed at the shop drawing stage.

orders@aaline.ca

647-254-3919

<https://www.aaline.ca/>

Ordering Guide

aaline

CERT	SERIES	MODEL	LENGTH	LIGHT DISTRIBUTION
LW-EB Linear Embedded	FO Focus	01 Single	4 4 ft 6 6 ft	DN Direct UP Indirect DU Direct + Indirect
DRIVER	CIRCUIT	DIMMING	LUMEN OUTPUT DIRECT	LUMEN OUTPUT INDIRECT
R Remote	1C 1 Circuit	010 0-10V	LO Low 4FT: 600 lm 4.4 W 135 lm/W 6FT: 900 lm 6.5 W 135 lm/W	LO Low 1452.4 lm 12.4 W 117.1 lm/W
C Powered Canopy	2C 2 Circuit	020 TRIAC/ELV DAL DALI	ST Standard 4FT: 900 lm 6.6 W 135 lm/W 6FT: 1350 lm 9.8 W 135 lm/W HI High 4FT: 1200 lm 8.7 W 135 lm/W 6FT: 1800 lm 13.1 W 135 lm/W	ST Standard 2234.4 lm 19 W 117.6 lm/W HI High 3383 lm 28.8 W 117.5 lm/W
OPTICS DIRECT	OPTICS INDIRECT	COLOUR TEMP	WOOD	WOOD FINISH
OV Oval ~25° + ~70° MD Medium ~35° W1 Wide ~50° W2 Extra Wide ~80° AS Asymmetric AW Asymmetric Wall Wash	LB Lambertian BW Batwing Wide ~145° + 100° BX Batwing Extra Wide ~165° + 130° AS Asymmetric	27K 2700K Warm White 90+ CRI 30K 3000K Soft White 90+ CRI 35K 3500K Bright White 90+ CRI 40K 4000K Cool White 90+ CRI	WAL Walnut OAK White Oak CHR Cherry MPL Hard Maple ASH White Ash	CFST Clear Finish Satin CFDO Clear Finish Danish Oil CFEC ECO Zero VOC PFBK Painted Satin Black PFWH Painted Satin White PFFX Enter a custom paint code
ANTI-GLARE CELL FINISH	ACOUSTIC FINISH	FENIX NTM	CANOPY COLOUR	CABLE COLOUR
AGNA Natural Matches wood selection AGBS Black Strip AGWC White Cell	F384 Felt Charcoal F382 Felt Pebble Grey F311 Felt Wool White F251 Felt Meadow Green F152 Felt Olive F000 Enter a custom felt code	FXBK Bianco Kos FXVC Verde Comodoro FXBF Blu Fes FXGB Grigio Bromo FXNI Nero Ingo F000 Enter a custom Fenix Finish code	WH White BK Black Custom Enter a custom canopy colour code.	C Clear Jacket with Silver Core
CABLE LENGTH	MOUNTING			
5 5ft Standard Adjustable 1' - 5' Custom (ft) Custom (ft)	JB Junction Box Support PO Power Over Cable TB T-Bar Support For 15/16" T-Bar Width			

Ordering Guide Rules

To be used with Order Guide above. For more questions on availability, contact us at orders@aaline.ca

¹ 2C (CIRCUIT) cannot go with DN and UP (LIGHT DISTRIBUTION)

² DAL (DIMMING) cannot go with C (DRIVER)

³ DN (LIGHT DISTRIBUTION) cannot go with LO and ST and HI (LUMEN OUTPUT INDIRECT)

⁴ UP (LIGHT DISTRIBUTION) cannot go with LO and ST and HI (LUMEN OUTPUT DIRECT)

⁵ DN (LIGHT DISTRIBUTION) cannot go with AS and LB and BW and BX (OPTICS INDIRECT)

⁶ UP (LIGHT DISTRIBUTION) cannot go with W2 and OV and AS and W1 and MD and AW (OPTICS DIRECT)

⁷ WAL or OAK or CHR or MPL (WOOD) cannot go with PFBK and PFWH and PFXX (WOOD FINISH)


⁸ JB (MOUNTING) cannot go with R (DRIVER)

⁹ TB or PO (MOUNTING) cannot go with C (DRIVER)


LIGHT DISTRIBUTION




DN
Direct




UP
Indirect



DU
Direct + Indirect

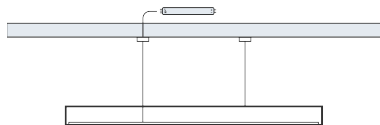


R
Remote




C
Powered Canopy

CIRCUIT




1C
1 Circuit




2C
2 Circuit


OPTICS DIRECT




OV
Oval
~25° + ~70°




MD
Medium
~35°




W1
Wide
~50°



W2
Extra Wide
~80°




AS
Asymmetric



AW
Asymmetric Wall Wash

OPTICS INDIRECT

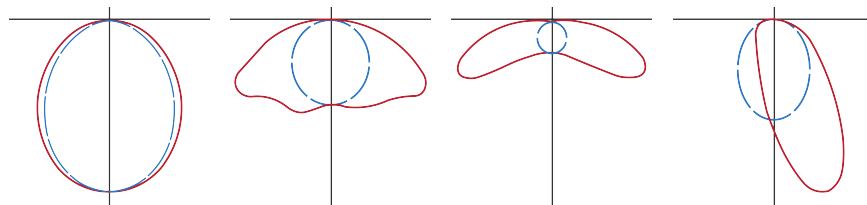

LB

Lambertian

BW

Batwing Wide
~145° + 100°

BX

Batwing Extra Wide
~165° + 130°

AS

Asymmetric

COLOUR TEMPERATURE



27K

2700K
Warm White
90+ CRI

30K

3000K
Soft White
90+ CRI


35K

3500K
Bright White
90+ CRI

40K

4000K
Cool White
90+ CRI

WOOD

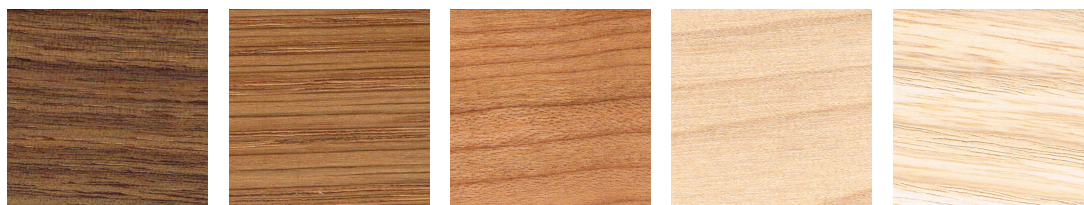

WAL

Walnut

OAK

White Oak

CHR

Cherry

MPL

Hard Maple

ASH

White Ash

ANTI-GLARE CELL FINISH



AGNA

Natural
Matches wood selection



AGBS

Black Strip



AGWC

White Cell

Due to material characteristics and environmental factors, actual product colours/finishes may vary slightly.

Specs + Materials

ACOUSTIC FELT [OPTIONAL]



F384
Felt
Charcoal



F382
Felt
Pebble Grey



F311
Felt
Wool White



F251
Felt
Meadow Green



F152
Felt
Olive




F000
Enter a custom felt code


FENIX NTM [OPTIONAL]



FXBK
Bianco Kos



FXVC
Verde Comodoro



FXBF
Blu Fes



FXGB
Grigio Bromo



FXNI
Nero Ingo



F000
Enter a custom Fenix
Finish code

MOUNTING



JB
Junction Box Support



PO
Power Over Cable



TB
T-Bar Support | For 15/16"...

Due to material characteristics and environmental factors, actual product colours/finishes may vary slightly.